[R S 58]

Previous references

Edn 680 of 97

Later references

1898-99
~~191~~
(Education)

File No 58

Serial Nos 1 – 2

GENERAL AND REVENUE SECRETARIAT

Serial Nos 1 — 2

~~**Part**~~ **B for** June 99

SUBJECT

Village School Building at Konanur Arkalgud Tq

Indexed
V Raghavacha

GPB—10 000—23 3 15

Ed 238

Edn 6]

OFFICE OF THE 6530 2 FEB 99 DIWAN OF MYSORE 189

From

The Inspector General of Education
in Mysore

To
The Secretary to the Govt of Mysore,
General and Revenue Departments

No 6090/201
Dated Mysore, 30th January 99.
Received

Enclosures No (Two)

Subject

Requesting the sanction of Government for the erection of a building of the IV Village School design for the Taluk Branch School at Idavanur, Arsikere Taluk

SECTION Education
FILE NO 5877/98

Ed
2-2-99

Sanction is issued today
22/6/99

Ldn 06]

OFFICE OF INSPECTOR GENERAL OF EDUCATION IN MYSORE

No 6090 / 201 - with 2 enclosures

~~Bangalore~~ Mysore, 30th January 1899

From

H J BHABHA Esq,

Inspector General of Education in Mysore

To

The Secretary to the Government of Mysore,
General and Revenue Departments

Sir

× 68 of 97 / A 2/80 13601-4 / Ed & 20-96

With reference to Government order of the 22nd April 1898, I have the honour to inform you that the work of constructing a new building for the accommodation of the Taluk Branch School at Konanur in the Attigud Taluk was not put in hand last year, as the plans and estimates of the Village School buildings had to be revised by Mr. B J Dalal. I request that Government may be pleased to sanction the construction of a building of the IV Village School Design for the Konanur Taluk Branch School from the allotment for Buildings in the current year's Village Sch

Final Budget. The plan and estimate of the TV Design are herewith forwarded for reference. The estimated cost is exclusive of the DPW establishment charges which will have to be added but if the work is entrusted to the agency of the DPW.

I have the honour to be,
Sir,
Your most obedient servant,

H J Bhabha
Inspector-General.

VILLAGE SCHOOL No. 4

SCALE 6 = 1

ESTIMATED COST Rs 1607

Attendance not exceeding 130.

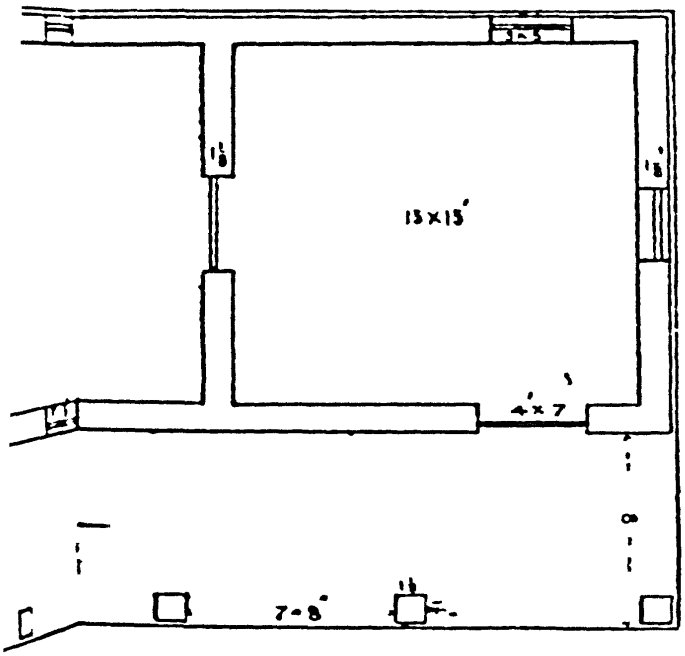

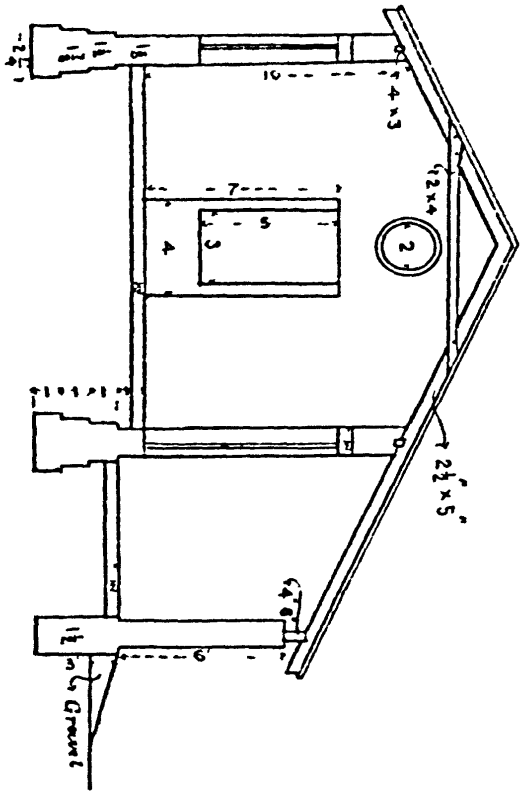

SECTION ON A B

MYSORE

DESIGN OF A VILLAGE SCHOO

— SCALE —

ESTIMATE C ST FT

Average daily attendance not

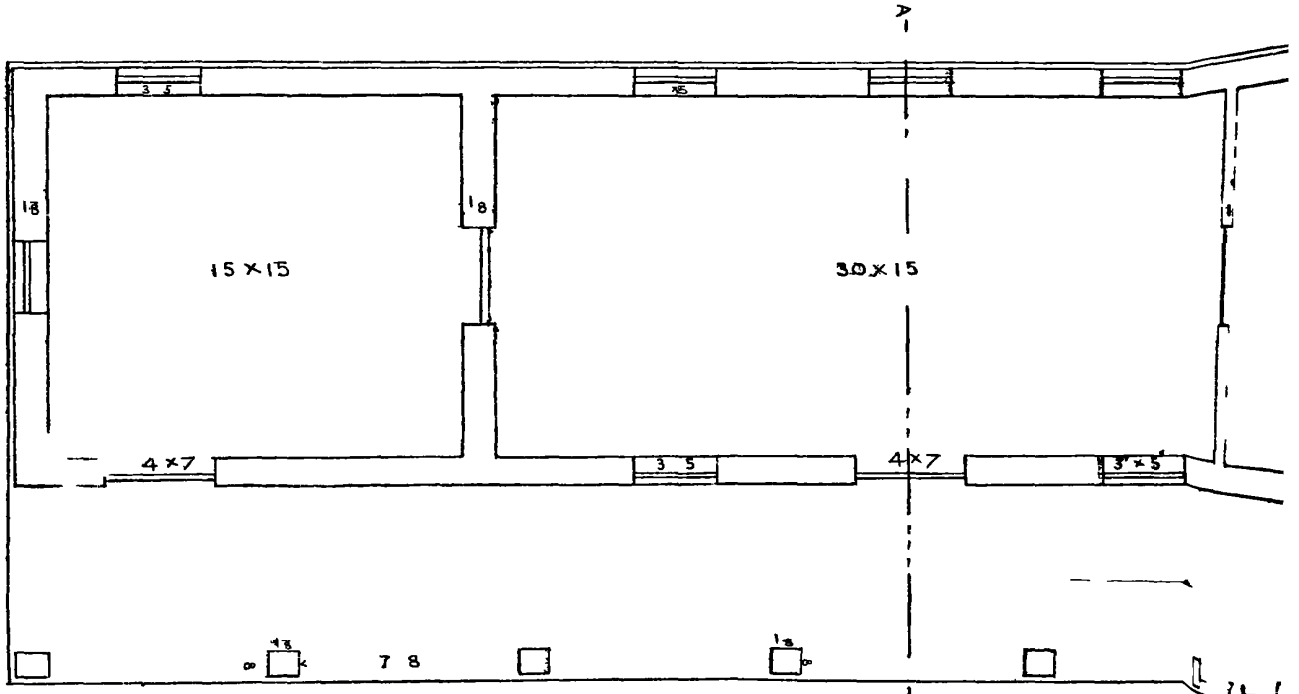

— PLAN —

Sri Rama Litho Press

ESTIMATE FOR CONSTRUCTING A HOBLI SCHOOL HOUSE

DESIGN No IV

DETAILS OF WORK		No	Dimensions L	B	D	Contents	
Main Building							
Earthwork Excavation —							
Foundations			65	2	1	95	
Ladder and cross walls		1	13	2	1	125	
	Total					420	Cyds 16
Brick Masonry —							
First class in foundations		2	65	2	1	295	
Extra do do		4	1	2	1	12	
Basement Footing and		2	60	1	1	240	
Extra do		4	14	1	1	107	
First class		2	64	1	1	195	
Extra do		4	14	1	1	88	
Footing walls		2	64	1	1	145	
Extra do cross wall		4	17	1	1	68	
Superstructure Front and		2	64	1	9	1415	
End and		4	15	1	10	675	
Gable		4	16	1	2	06	
	Total					564	Cft
Deductions—							
Doors		5	4	1	7	190	
Windows		9	3	1	5	193	
Circular		2	5 a a	1		11	
Lintel		5	7	1½	–	20	
Doors		9	6	1½		30	
	Total deductions					446	
Balance Cft burnt Brick in chunam							Cft 3 118
Slabs sto 6 thick—							
Lintel over doors		5	7	1		39	
Do windows		9	6	1		61	
Slab at side of windows		9×2	2	½	( )	27	
Over step		3	5	1		15	
	Total					142	Sft 142
White washing—							
Interior of Hall		1	90		10	900	
Do class room		2	60		10	1 200	
Latticed doors		1	163		9	1 549	
Compartment side and		1	99		2	198	
Do		1	64½		1	65	
	Total					3 912	Sq 39 12

DETAILS OF WORK	No	Dimensions L	B	D	Contents	
Teak wood work—						
Rafters $2\frac{1}{2}$ apart to Main building	2×27	11	$2\frac{1}{2}$	$\frac{1}{2}$	51 56	
Collars	27	10	2	4	15 00	
Wall plates	2	64	4	3	10 66	
Total						Cft 77 22
Teak wood Eave boards (8 × 1)	1	65			65	Rft 65
Arch work in front of windows to act as sunshades	9	$5\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{4}$	28	Cft 28
Gravel—						
To floor Hall	1	$\frac{-}{3}$	$\frac{-}{3}$	$\frac{-}{3}$	8	
Do side Room	2	—	$\frac{1}{3}$	$\frac{-}{3}$	8	
Total					16	Cyd 16
Teak wood doors (4 × 7)	5				5	No 5
Do windows (3 × 5)	9				9	No 9
Circular ventilator	2				2	No 2
Mangalore tiled roof	2	$45\frac{1}{4}$	$11\frac{1}{4}$		10 13	Sq 10 13
VERANDAH						
Earth work Excavation—						
Pillars	8	$1\frac{1}{2}$	$1\frac{1}{2}$	2	36	Cyd 1
Burnt Brick in chunam—						
Pillars	8	$1\frac{1}{2}$	$1\frac{1}{2}$	2	36	
Basement Pillars	8	$1\frac{1}{2}$	$1\frac{1}{2}$	1	18	
Superstructure do	8	$1\frac{1}{8}$	$1\frac{1}{8}$	6	61	
Total					115	Cft 115
White washing—						
Pillars	8	$4\frac{1}{2}$		6	216	Sq 2 16
Teak wood—						
Rafters $2\frac{1}{2}'$ apart	27	$8\frac{1}{2}$	$2\frac{1}{2}'$	5′	19 92	
Summers	1	65	4	6	10 83	
Total						Cft 30 75
Gravel—						
Flooring	1	$\frac{64-}{3}$	—	$\frac{1}{3}$	10	
Front	1			$\frac{0+1}{2\times3}$	3	
Total					13	Cyd 13
Roofing with Mangalore tiles	1	65	$8\frac{1}{2}$		553	Sq 5 53

Abstract

ITEMS	UNIT	RATE			MAIN BUILDING		VERANDAH		TOTAL COST
		R	AS	P	Q	C	Q	C	
Earth work Excavation	Cyl	0	2	0	16	2	1		[illegible]
Burnt brick in chunam fill ing of under B's	Cft	0	2	9	3118	536	115	20	556
Do do arch work	Cft	0	4	0	28	7			
Stone labs 6 thick	Sft	0	3	6	142	31			31
White wash two coats	Sq	0	3	0	9 12	7	2 16		7
Teak wood work	Cft		8	0	422	90	30 5	108	378
Teak wood Eave board (8 × 1)	Rft	0	4	0	65	16			16
Gravel	C d	0	8	0	16	8	13	7	15
Teak wood doors (4 ×)	No	16	0	0	5	80			80
Do Windows (3 × 5)	No	16	0	0	9	144			144
Circular vent let	No	6	0	0	2	12			12
Mangalore tiles on fine including ridge tiles	Sq	18	0	0	10 13	182	5 3	100	282
Total						1 295		230	1 530
Contingencies at 5 per cent						65		12	[illegible]
Grand Total Rupees						1 360		247	1 60[illegible]

C T DALAL

Executive Engineer
Tumkur Division

Estimate for Constructing a Hobli School House,

DESIGN No IV

Amount of Estimate Rs 1,607

(80)

Read _____

Letter No 6002 dated 30th
201
January 1899, from the
Inspector General of Ed
in Mysore, reporting that the
work of constructing a new
school building for the ac-
-commodation of the Taluk
Branch school at Konanur
in the Arkalgud Taluk, which
was sanctioned by Govt in
their order No 13601-4 d 22nd
Ed F 20-96
April 1898, was not put in
hand ~~last year~~ in that year
as the plans and estimates
of the village school buildings
in general, had to be revised
by the ~~C T Dalal Executive~~
~~Engineer~~ and ~~therefore~~
requesting sanction for
the construction of a building
of the IV village school design
for the same school from the
allotment for buildings in

Education
5 8 798
2

Estimate for Constructing a Hobli School House,

DESIGN No IV

Amount of Estimate Rs 1,607

(80)

Read ———

Letter No 6004/201 dated 30th January 1899, from the Inspector General of Edn in Mysore, reporting that the work of constructing a new school building for the accommodation of the Taluk Branch school at Konanur in the Arkalgud Taluk, which was sanctioned by Govt in their order No 13601-4 Ed F 20-96 dated April 1898, was not put in hand ~~last year~~ in that year as the plans and estimates of the village school buildings, in general, had to be revised ~~by the C.E. Dalal Executive~~ Engineer and ~~therefore~~ requesting sanction for the construction of a building of the III village school design, for the same school from the allotment for Buildings in

SECTION Education
FILE No 5-8 of 98
SERIAL 2

in the current year's village
school fund Budget, at an
cost of Rs 1607/- as per plan & estimate prepared by Sri C T Palal
the D O W establishment which excludes,
charges which will have
to be added to it if the work
is entrusted to the agency
of the D O W

Sanctioned. order No 14527-28 Ed F 20-96 Dt 24/6/96

The cost of Rs 1607/- will be
met from the allotment of Rs 10,000
for buildings in the current
years village school fund
Budget The estimate may be raised by 10% if the wo
The DPI will obtain Govt sanction is to be carried out by
for the D O W establishment charges the D O W
if the work be entrusted to that agency

Secretary

KCS
27/6/96

To The DPI of Edn in Mysore
Copy Mysore Govt (with Copy of the Abstract
of the estimate